



Vendo
SANDEN

COMPLETE CATALOGUE 2023

COMPANY PROFILE	2
G-CAFFÈ	12
G-DRINK	22
G-SNACK	34
BOTTLE AND CAN (B&C)	52
SLAVE VERSIONS	58
COIN CHANGER.....	68

WE ARE SANDENVENDO

SALES & DISTRIBUTION

SandenVendo GmbH

European Operations

SandenVendo offers reliable products and services throughout a commercial and marketing network that spans Germany, France, Italy, Spain, Benelux and UK.

Backed with over 80 years of experience and globally renowned as a leader in heat-exchange and vending technologies manufacturing, SandenVendo delivers its excellence to 70 countries worldwide.

The heat-exchange system, that represents SandenVendo's core technology, enables the company to provide innovative, efficient and environmentally-friendly products that aid for a better society.

Still today, SandenVendo strives to design business models able to improve and inspire the culture and lifestyle of communities around the world.

MANUFACTURING

SandenVendo Europe SpA

Located in Northern Italy, SandenVendo's engineering and manufacturing plant was established in 1965 with the aim of designing a sustainable manufacturing system through the entire flow of supply chain, waste recycling and quality control in terms of product development and production.


Here, in 2019, SandenVendo launched the Carbon Neutral Project, a mission whose purpose is defending the local biodiversity by equalizing the CO₂ emissions due to the plant's manufacturing activity.

The ambition is to achieve diversification by stepping beyond the vending sector, accessed thanks to the Company's core technology of the heat-exchange system, and reach out to commercial refrigeration and agriculture.

The Italian factory is certified with ISO 9001 (quality management), ISO 14001 (environmental management) and EcoVadis (CSR).

The Thermodynamics Experts

SANDENVENDO, the specialist in heating and cooling technologies, is recognized as one of the leading companies in applying its heat exchange expertise in appliances for food refrigeration, coffee machines and condensing units.




Vending Machines

Drinks, food, snacks and extra-vending solutions to create business opportunities



Coffee Machines

Espresso and instant drinks for all venues, available in freestanding and tabletop versions



Commercial Refrigeration

Flexible, intermediate and all-in-one solutions for your business



History

We aim at becoming an “Excellent Company” by supporting the “global” growth as a manufacturer for food-related equipment.



1930
THE ORIGINS



Vendo

1931

Vendorlator Inc. founded in Fresno, California

1937

Vendo Co. founded in Kansas City, Missouri


1956

Vendo Co. merges with Vendorlator Inc.





1960
EUROPEAN
OPERATIONS



Vendo universal milk vender

Vends Half Pints to Quarts
for both take-home trade and on-premise consumption!

Here's recently built as you've never seen before. Now you can vend milk in any size portion—1/2 pint, 1/4 quart, pint and quart (3/4 pint, 1/2 quart or 1/4 quart). And that's not all! You can offer three product selections at the same time... at three different prices from 10¢ to 30¢.

Convenient one-hand operation! Customers just dip in coin, push the button for selection—see "one drink" delivery—milk being in the exact portion of selection.

The Vendo Universal Milk Vender gives you more in every way—reliability of operation... low maintenance costs... easy to keep clean interior... all-steel construction... portable heated exterior finish. Here's... Here's... Here's why Vendo is the world's most popular milk vender.

1961
Subsidiaries established in
Germany, France and Belgium

1965
Set up of production facility
in Casale Monferrato,
Northern Italy

1967
Subsidiary established in
Spain

1988
Vendo becomes part of the
Sanden Corporation



1990

BUSINESS EXPANSION



1997

First expansion of the Casale factory, Italy

1999

Second expansion of the Casale factory, Italy

2001

Acquisition of Vendhall UK

2002

Start of cooler and coinage business in Europe

New factory established in Akagi, Japan



2004

First vending machine equipped with CO₂



Produced for Athene Olympic Games

2005

Combi, the first drink and snack vending machine

Gsnack Fullsnack, the first glass front vending machine



2005

SUSTAINABLE
DEVELOPMENT



2017

The launch of patented
HC solution

2018

Launch of CO₂
condensing unit



2020

Launch of Carbon
Neutral Project

2009

Launch of revolutionary
global glass front vendor

2012

Launch of New Design Line

2015


New Coffee machine
Development



2015

50th Anniversary of Factory
in Italy

50th
1965-2015
SANDEN VENDO





SandenVendo Powered by Nature

SANDENVENDO HAS DEVELOPED A RANGE OF VENDING MACHINES WHERE HYDRO CARBON IS SAFELY APPLIED: A PATENTED, ORIGINAL SOLUTION THAT ALLOWS FOR PURSUING OUR COMMITMENT TOWARDS THE APPLICATION OF NATURAL REFRIGERANTS.




In 2017, in compliance with the EU F-Gas ban regulation, the company has developed its innovative Vending Machines powered by R290 natural gas.

The G-Drink, G-Snack and B&C Hydro Carbon versions are equipped with R290 gas, a natural, non-toxic refrigerant that is an eco-friendly alternative to the CFC/HCFC/HFC fluorocarbons related to the ozone damage.

SandenVendo has successfully achieved this challenge by pioneering an innovative and patented process where R290 is safely applied to the current range of refrigerated vending machines.

SandenVendo's ECO foot steps

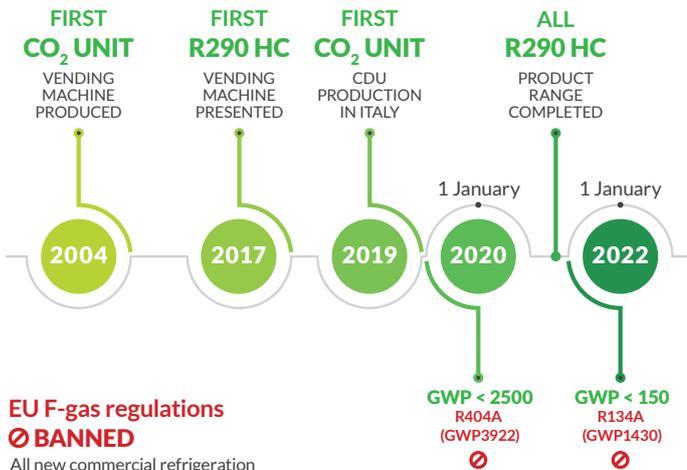

EU F-gas regulations
❌ BANNED
All new commercial refrigeration equipment placed in EU market.



SandenVendo strives to create ECO-friendly solutions by applying Natural Refrigerants, in order to reduce the direct and indirect emission of greenhouse gases and less impact on GWP.

Both CO₂ (R744) and HC (R290) refrigerants has minimal GWP and Zero ODP.



THE FUTURE OF ECO-FRIENDLY RESOLUTIONS BEGINS WITH THIS **PATENTED DESIGN** THAT PIONEERED THE HC SOLUTION IN THE VENDING MARKET

New Touch Display

YOUR CRAVINGS AT YOUR FINGERTIPS

A highly inter-active and customizable touch display that will boost your sales



Impulse sales

Its highly inter-active performances will keep you wanting more



User-friendly

An intuitive graphic to satisfy your cravings with ease



Customizable

Personalize the layout, insert your logo and stand out from the crowd!

Enhance your profits and engage customers by providing them with the latest technologies applied to the touch screen on new SandenVendo vending machine.

A top-notch touch screen display equipped with multi-selection, a feature so attractive and user-friendly that will induce customers to want purchase more. Further, providing the useful nutritional insights, specific brand promotions will drive customer attention with intuitive marketing tools.

An advanced control panel that enables you to manage the vending machine effortlessly.





GCafè
by SandenVendo



EXCELLENT ITALIAN ESPRESSO

The SandenVendo Coffee brewer delivers authentic espresso flavors and aromas in the way the Italians do best.

Two brewer types are available: one for the genuine Italian type espresso and the larger one for European style longer coffee, both provide an excellent Italian taste.



ONE CUP, ONE TEMPERATURE

Thanks to the precise temperature management, individual drink temperature settings are possible. Users can also adjust the temperature of their drinks on the touch screen **Warm > Hot > Very Hot.**



LOW ENERGY CONSUMPTION

Innovative temperature management with SandenVendo Instant Heater technology. It is an energy efficient design with very low thermal mass and does not require a Stand-by function. The system always uses fresh water providing the precise amount required for each drink.

TABLE TOP PRODUCT RANGE



CAFFÈUNO "PRO"
ESPRESSO w/ hopper



CAFFÈUNO
ESPRESSO



CAFFÈUNO
INSTANT

FREE-STANDING PRODUCT RANGE



G-CAFFÈ UNI-Q TOUCH
ESPRESSO - INSTANT



G-CAFFÈ UNI-Q
ESPRESSO - INSTANT



CaffèUNO with hopper
Semiautomatic Espresso
with touch screen.
Ideal for breakfast buffet.

■ CAFFÈUNO COFFEESERVER

Enhance your downtime

CaffèUNO is the compact tabletop coffee server designed to fit in any location without compromising on coffee quality; available in black or white monochrome, CaffèUNO is the modern espresso coffee vending server equipped with a large and user-friendly touch display or direct selection panel.

One cup, one temperature: ideal for breakfast buffets and meeting rooms, the top-notch heating system installed on CaffèUNO allows for customizing each cup's temperature setting, while the "PRO" model with visible coffee beans hopper will give a twist to your usual coffee breaks.



Bean-to-cup

ULTIMATE TECHNOLOGY FOR A REAL ITALIAN ESPRESSO





New SandenVendo Brewer

The new SandenVendo espresso brewer excels at providing an authentic Italian taste.

The brewer is available in 2 sizes of infusion chamber; v-36 for the authentic Italian type Espresso and v-42 for European style longer coffee.



Flexible Heating System

An innovative Temperature Management System.

The light weight instant heater is an energy efficient design with very low thermal mass.

Thanks to the fast water flow and vacuum system at the end of each dispensing cycle within the system, it minimizes the formation of lime scale, and always uses fresh water in the precise amount required for each drink.

No Stand-by mode required.



One Cup, One Temperature

Individual drink temperature settings are possible.

For example, Espresso is ideally served at 85-94°C, while tea typically requires a higher temperature of 95-100°C.

Customize-able drink temperature
Users can adjust the temperature of their drinks on the touch screen.

Precise temperature management
Output temperature can be controlled within +/- 1°C.



2 TYPES OF INTERFACE AND PERSONALIZATION

Choose the interface according to the needs of locations.
The interface panel can be replaced easily and panel can be personalized.



TOUCH

An elegant 10 inch TOUCH screen provides an intuitive icon menu on your fingertip!



DIRECT SELECTION

Casual and quick serving solution by choosing the drink menu directly




CAFFÈUNO "PRO"
ESPRESSO w/ hopper semiautomatic
TSC

CAFFÈUNO
ESPRESSO semiautomatic
TSE

CAFFÈUNO
INSTANT semiautomatic
TSH

DIMENSIONS H x W x D	770 x 420 x 530 mm	660 x 420 x 530 mm	660 x 420 x 530 mm
WEIGHT (NET - Standard machine without options)	35 Kg	35 Kg	35 Kg
COFFEE BEANS CONTAINER	2,4 kg (hopper)	1,2 kg	///
POWDER CANISTER	2 Large 1 Small	2 Large 1 Small	2 Large 2 Medium 1 Small
GRINDER	Professional conical burr	Professional conical burr	///
INTERFACE	TOUCH	10" Touch screen	10" Touch screen
	DIRECT SELECTION	5" Display with direct push button	5" Display with direct push button
WATER FITTING CONNECTION	G 3/4" 2 - 8 Bar (0.2 Mpa - 0.8 Mpa)	G 3/4" 2 - 8 Bar (0.2 Mpa - 0.8 Mpa)	G 3/4" 2 - 8 Bar (0.2 Mpa - 0.8 Mpa)
THERMO FUSE	16A	16A	16A
PAYMENT SYSTEM PROTOCOL [OPTIONAL]	MDB / Executive	MDB / Executive	MDB / Executive
POWER SUPPLY	220/240 V - 50/60 Hz	220/240 V - 50/60 Hz	220/240 V - 50/60 Hz
ENERGY CONSUMPTION*	134 Wh/L	134 Wh/L	134 Wh/L

*Energy consumption in Wh per liter of Espresso dispensed



BASE CABINET

P/N T1841/3 BLACK | P/N T1841/4 WHITE

DIMENSIONS H x W x D	820 x 420 x 515 mm
WEIGHT	21,4 Kg

*BASE CABINET requires KIT 145222 Water Tank 20 little KIT, Clip, Bucket and tubes and cables

PRODUCT	CANISTER SIZE		
	SMALL	MEDIUM	LARGE
POWDER MILK	0.3 Kg	0.7 Kg	1.0 Kg
CHOCOLATE	0.8 Kg	1.5 Kg	2.2 Kg
LEMON TEA	1.0 Kg	2.0 Kg	3.0 Kg
GINSENG TEA	0.5 Kg	1.0 Kg	1.5 Kg
INSTANT COFFEE	0.3 Kg	0.6 Kg	0.9 Kg
BARLEY COFFEE	0.2 Kg	0.4 Kg	0.6 Kg



OPTION LIST

- Touch screen 10"
- Large Espresso brewer
- Cup sensor
- Water tank kit 20 lt.
- Water softener (filter) external fitting
- Special coded lock (Rielda)
- Payment system
- Base cabinet
- Payment Tower Module
- Customized panel
- Customized cabinet colour



MAINTENANCE

- SW update through USB
- Easy regular maintenance via 4 function keys
- 24V DC devices (except heater, grinder & pump)
- Color coded materials by maintenance period
- Maintenance message on display

STANDARD COLOURS

Black ● | White ○



G-Caffè UNI-Q

■ G-CAFFÈ UNI-Q TOUCH

Your coffee break just got better

Created with the customers' needs in mind, G-Caffè UNI-Q Touch is equipped with a new, 18" touch display with disability-friendly interface; a smart and innovative display designed to communicate with the Slave vending machine associated to the new G-Caffè UNI-Q Touch machine.

Connect a G-Snack Slave machine to the new G-Caffè UNI-Q Touch and provide customers with a full array of snacks to match their hot drinks; the new 18" touch display will collect each multi-purchasing order and guide the users throughout the entire operation while showcasing products offers, nutrition facts and graphic contents of your choice.

	G-CAFFÈ UNI-Q ESPRESSO HS 7T		G-CAFFÈ UNI-Q INSTANT HN 7T	
DIMENSIONS H X W X D	1830 x 655 x 770 mm		1830 x 655 x 770 mm	
WEIGHT (NET - Standard machine without options)	180 kg		180 kg	
CUP TYPES	Ø 70-73 mm	Ø 80 mm	Ø 70-73 mm	Ø 80 mm
CUPS (pcs)	Up to 750	Up to 550	Up to 750	Up to 550
STIRRER (90/105/115 mm)	500 pcs		500 pcs	
NO. OF SELECTIONS	22		22	
PRE-SELECTION	1 (Sugar)		1 (Sugar)	
INGREDIENT CANISTER	6x M size (4,4 l)		8x M size (4,4 l)	
DISPLAY	18.5" Touch screen		18.5" Touch screen	
WATER FITTING CONNECTION	G 3/4" 2-8 bar (0,2 Mpa – 0,8 Mpa)		G 3/4" 2-8 bar (0,2 Mpa – 0,8 Mpa)	
PROTOCOL	MDB / Executive		MDB / Executive	
INSTANT HEATER (RATED POWER)	1x 2300W (Espresso) 1x 3200W (Powder)		1x 3200W	
POWER SUPPLY	220-240 V / 50-60 Hz		220-240 V / 50-60 Hz	
MAX. POWER CONSUMPTION	134 Wh/L		134 Wh/L	

*Energy consumption in Wh per liter of Espresso dispensed

MAIN COMPONENTS	QUANTITY	CAPACITY
COFFEE BEANS CONTAINER	1	4.9 kg (single) - 5.1 kg (double)
GRINDER (STANDARD)	1	Professional Conic blade
SUGAR CONTAINER IN CUP	1	5.8 l - 5 kg

PRODUCT	CANISTER SIZE (4,4 l)
SUGAR	3.8 Kg
POWDER MILK	1.4 Kg
CHOCOLATE	3.3 Kg
LEMON TEA	4.4 Kg
GINSENG TEA	2.2 Kg
DECAF. COFFEE	2.2 Kg
INSTANT COFFEE	2.2 Kg
BARLEY COFFEE	0.6 Kg



OPTION LIST

- Large espresso brewer
- Double grinder
- Cup sensor
- 80 mm cup dispenser
- Water tank kit 20 lt.
- Water softener (filter)
- Special coded lock (Rielda)
- Security cash box system
- Payment system

- Telemetry kit
- DEX / UCS kit
- Kit EVA DTS
- Various fitting kits
- Customization
- Customized panel
- Customized cabinet colour

STANDARD COLOUR

Black ●



User-friendly 18.5" touch screen

Created with the customers' needs in mind



USER INTERFACE

- LED door panel illumination
- Ergonomic design for children and wheel chair users
- Flexible cup dispenser available as standard
70-73 mm (option 80 mm)
- Capacity to accommodate up to 3 payment system together
Linux OS
- Master - slave connections with G-Snack slave machine



MAINTENANCE

- SW update through USB
- Easy pull out drawer for quick maintenance
- 24 VDC devices (except heater, grinder, pump)



G-Caffè UNI-Q

■ G-CAFFÈ UNI-Q

Uniqueness at a glimpse

Enjoy an authentic Italian espresso: G-Caffè UNI-Q is the freestanding coffee vending machine that extracts all the essence of coffee to its utmost flavour thanks to its ingeniously designed espresso brewer.

Equipped with an innovative temperature management system with an instant heater, G-Caffè UNI-Q is an energy-efficient coffee machine with low thermal mass to allow for continuous drink preparation without interruption.

Available with the original coffee brewer or instant powder supply, both models come with an innovative touch display selection.

	G-CAFFÈ UNI-Q ESPRESSO HS 7		G-CAFFÈ UNI-Q INSTANT HN 7	
DIMENSIONS H X W X D	1830 x 655 x 770 mm		1830 x 655 x 770 mm	
WEIGHT (NET - Standard machine without options)	180 kg		180 kg	
CUP TYPES	Ø 70-73 mm	Ø 80 mm	Ø 70-73 mm	Ø 80 mm
CUPS (pcs)	Up to 750	Up to 550	Up to 750	Up to 550
STIRRER (90/105/115 mm)	500 pcs		500 pcs	
NO. OF SELECTIONS	22		22	
PRE-SELECTION	1 (Sugar)		1 (Sugar)	
INGREDIENT CANISTER	6x M size (4,4 l)		8x M size (4,4 l)	
DISPLAY	7" Touch screen		7" Touch screen	
WATER FITTING CONNECTION	G 3/4" 2-8 bar (0,2 Mpa – 0,8 Mpa)		G 3/4" 2-8 bar (0,2 Mpa – 0,8 Mpa)	
PROTOCOL	MDB / Executive		MDB / Executive	
INSTANT HEATER (RATED POWER)	1x 2300W (Espresso) 1x 3200W (Powder)		1x 3200W	
POWER SUPPLY	220-240 V / 50-60 Hz		220-240 V / 50-60 Hz	
MAX. POWER CONSUMPTION	134 Wh/L		134 Wh/L	

*Energy consumption in Wh per liter of Espresso dispensed

MAIN COMPONENTS	QUANTITY	CAPACITY
COFFEE BEANS CONTAINER	1	4.9 kg (single) - 5.1 kg (double)
GRINDER (STANDARD)	1	Professional Conic blade
SUGAR CONTAINER IN CUP	1	5.8 l - 5 kg

PRODUCT	CANISTER SIZE (4,4 l)
SUGAR	3.8 Kg
POWDER MILK	1.4 Kg
CHOCOLATE	3.3 Kg
LEMON TEA	4.4 Kg
GINSENG TEA	2.2 Kg
DECAF. COFFEE	2.2 Kg
INSTANT COFFEE	2.2 Kg
BARLEY COFFEE	0.6 Kg



OPTION LIST

- Large espresso brewer
- Double grinder
- Cup sensor
- 80 mm cup dispenser
- Water tank kit 20 lt.
- Water softener (filter)
- Special coded lock (Rielda)
- Security cash box system
- Payment system

- Telemetry kit
- DEX / UCS kit
- Kit EVA DTS
- Various fitting kits
- Customization
- Customized panel
- Customized cabinet colour

STANDARD COLOUR

Black ●



INNOVATION

- Individual drink temperature setting
- Temperature pre-selection
- Easy regular maintenance via touch panel
- Coffee container flex system
- Large VFD (vacuum fluorescent graphic display)
- Variable speed mixers
- Variable speed ingredient motors



USER INTERFACE

- LED door panel illumination
- Ergonomic design for children and wheel chair users
- Flexible cup dispenser available as standard
70-73 mm (option 80 mm)
- Capacity to accommodate up to 3 payment system together
- Linux OS
- Master - slave connections with G-Snack slave machine



MAINTENANCE

- SW update through USB
- Easy pull out drawer for quick maintenance
- 24 VDC devices (except heater, grinder, pump)




GDrink

by SandenVendo



VERTICAL RAIL-SYSTEM

The new vertical lift system allows the catcher to slide over the bottle (also glass bottles) without hindering its movement.



ERGONOMIC DESIGN

The delivery area is designed at an optimal power zone position according to ergonomic principals where a neutral posture is maintained. While collecting the products, it ensures minimum stress to the body with a simple single-handed operation.



MODULAR

Discover the Modular System developed for solving the problem of narrow passages.



ECO-FRIENDLY SOLUTION

Crafted with a patented HC cooling unit (R290) Natural Refrigerants to reduce the direct and indirect emission of greenhouse gases and less impact on GWP

INDOOR PRODUCT RANGE




**G-DRINK
DESIGN TOUCH**




**G-DRINK
DESIGN**




**G-DRINK
STANDARD**

OUTDOOR PRODUCT RANGE




**G-DRINK
OUTDOOR TOUCH**




**G-DRINK
OUTDOOR**

THE MODULAR G-DRINK DESIGN IS DEVELOPED TO OVERCOME THE HASSLE OF A NARROW DOORWAY.

QUICK AND EASY INSTALLATION
The mechanical part of the unit can be easily separated from the electronic one: this reduces the main cabinet by 20 cm





G-Drink Design 9
Vertical Touch

G-DRINK TOUCH

Essentials at your fingertips

Equipped with a vertical lift system and a highly interactive and customizable touch display, G-Drink Touch is the automatic vending machine designed to engage customers and boost your sales.

Created with the aims of a marketing tool, the top-notch touch display holds an attractive, user-friendly multi-selection feature that will persuade customers to purchase more items while providing useful nutritional insights and advertise brand promotions: an advanced control panel that enables you to effortlessly manage the vending machine.



**G-DRINK 9
DESIGN TOUCH
DT9**



**G-DRINK 6
DESIGN TOUCH
DT6**

DIMENSIONS H x W x D	1830* x 1215 x 845 mm	1830* x 940 x 845 mm
WEIGHT (NET - Standard machine without options)	345 kg	295 kg
NO. OF SELECTIONS PER SHELF	9	6
NO. OF SHELVES	Standard 5 / Max. 7	Standard 5 / Max. 7
NO. OF SELECTIONS	Standard 45 / Max. 63	Standard 30 / Max. 42
DISPLAY	7" Touch screen	7" Touch screen
MAX. CAPACITY (0,33 l CANS)	504	336
MAX. CAPACITY (0,50 l PET BOTTLES)	360	240
PROTOCOL	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic
COOLING UNIT		
INTERNAL TEMPERATURE RANGE	+2°C up to +10°C	+2°C up to +10°C
MAX. POWER CONSUMPTION	800 W	800 W
CLIMATE CLASS	N (+16°C up to +32°C)	N (+16°C up to +32°C)
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz
ENERGY CLASS		
ENERGY CONSUMPTION (kWh/annum)	1562	1330

* With adjustable leveling screw



OPTION LIST

- Special coded lock (Rielda)
- Lock protection
- Safety slide coin insert
- Security cash box system
- Wall/floor fixing kit
- Payment system
- Kit EVA DTS
- Various fitting kits
- Customization
- Customized cabinet colour

STANDARD COLOUR

Black ●



**PET BOTTLES, GLASS BOTTLES, CANS
VENDIBLE PRODUCT SIZE**

Diameter	min. 43.5 mm	max. 73 mm
Height	min. 88 mm	max. 285 mm
Weight	min. 185 g	max. 653 g (980 g x6F)



**CARTON PACKS (BRICK)
VENDIBLE PRODUCT SIZE**

Width	min. 52 mm	max. 67 mm
Depth	min. 40 mm	max. 47 mm
Height	min. 85 mm	max. 134 mm
Weight	min. 213 g	max. 400 g

Please note: The above dimensions are for reference only.

Some products, although within the above dimensions, may be difficult to vend due to its shape.
Please vend test products before filling machine.



G-Drink Design 9
Vertical

G-DRINK DESIGN

Hydro-lution

The most successful glass-front vending machine of our history renovates its look in a modern, sophisticated yet timeless way. Conceived with a new, brighter LED illumination structure to enhance the visibility of the drinks displayed inside, G-Drink Design is equipped with an innovative, back-lit keypad to ease the selection operations in both luminous and dark venues.

Available in two models, with 9 or 6 selections per shelf, G-Drink Design is geared up with a vertical lift system and all of SandenVendo's top-notch cooling technologies and an easy door-latching system.



**G-DRINK 9
DESIGN
DV9**



**G-DRINK 6
DESIGN
DC6**

DIMENSIONS H x W x D	1830* x 1215 x 845 mm	1830* x 940 x 845 mm
WEIGHT (NET - Standard machine without options)	345 kg	295 kg
NO. OF SELECTIONS PER SHELF	9	6
NO. OF SHELVES	Standard 5 / Max. 7	Standard 5 / Max. 7
NO. OF SELECTIONS	Standard 45 / Max. 63	Standard 30 / Max. 42
MAX. CAPACITY (0,33 l CANS)	504	336
MAX. CAPACITY (0,50 l PET BOTTLES)	360	240
PROTOCOL	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic
COOLING UNIT		
INTERNAL TEMPERATURE RANGE	+2°C up to +10°C	+2°C up to +10°C
MAX. POWER CONSUMPTION	800 W	800 W
CLIMATE CLASS	N (+16°C up to +32°C)	N (+16°C up to +32°C)
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz
ENERGY CLASS		
ENERGY CONSUMPTION (kWh/annum)	1562	1330

*With adjustable leveling screw



OPTION LIST

- Special coded lock (Rielda)
- Lock protection
- Safety slide coin insert
- Security cash box system
- Wall/floor fixing kit
- Payment system
- Kit EVA DTS
- Various fitting kits
- Customization
- Customized cabinet colour


STANDARD COLOUR

Black ●



**PET BOTTLES, GLASS BOTTLES, CANS
VENDIBLE PRODUCT SIZE**

Diameter	min. 43.5 mm	max. 73 mm
Height	min. 88 mm	max. 285 mm
Weight	min. 185 g	max. 653 g (980 g x6F)



**CARTON PACKS (BRICK)
VENDIBLE PRODUCT SIZE**

Width	min. 52 mm	max. 67 mm
Depth	min. 40 mm	max. 47 mm
Height	min. 85 mm	max. 134 mm
Weight	min. 213 g	max. 400 g

Please note: The above dimensions are for reference only.
Some products, although within the above dimensions, may be difficult to vend due to its shape.
Please vend test products before filling machine.



G-Drink DM 9
Vertical

G-DRINK STANDARD

Elevate your vending standards

Contrary to the popular belief that “standard” means “less”, our G-Drink Standard model is an automatic vending machine that leaves nothing to be desired from other models on the market.

Equipped with SandenVendo’s flagship cooling technologies and a vertical lift system, G-Drink Standards is available in two spacious models with 9 or 6 selections per shelf; each model comes with a new LED illumination structure designed to enhance the visibility of the drinks displayed inside.



**G-DRINK 9
STANDARD
DM9**



**G-DRINK 6
STANDARD
DM6**

DIMENSIONS H x W x D	1830* x 1215 x 845 mm	1830* x 940 x 845 mm
WEIGHT (NET - Standard machine without options)	345 kg	295 kg
NO. OF SELECTIONS PER SHELF	9	6
NO. OF SHELVES	Standard 5 / Max. 7	Standard 5 / Max. 7
NO. OF SELECTIONS	Standard 45 / Max. 63	Standard 30 / Max. 42
MAX. CAPACITY (0,33 l CANS)	504	336
MAX. CAPACITY (0,50 l PET BOTTLES)	360	240
PROTOCOL	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic
COOLING UNIT		
INTERNAL TEMPERATURE RANGE	+2°C up to +10°C	+2°C up to +10°C
MAX. POWER CONSUMPTION	800 W	800 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz
CLIMATE CLASS	N (+16°C up to +32°C)	N (+16°C up to +32°C)
ENERGY CLASS		
ENERGY CONSUMPTION (kWh/annum)	1562	1330

* With adjustable leveling screw.



OPTION LIST

- Special coded lock (Rielda)
- Lock protection
- Safety slide coin insert
- Security cash box system
- Wall/floor fixing kit
- Payment system
- Kit EVA DTS
- Various fitting kits
- Customization
- Customized cabinet colour


STANDARD COLOUR

Black ●



**PET BOTTLES, GLASS BOTTLES, CANS
VENDIBLE PRODUCT SIZE**


Diameter	min. 43.5 mm	max. 73 mm
Height	min. 88 mm	max. 285 mm
Weight	min. 185 g	max. 653 g (980 g x6F)



**CARTON PACKS (BRICK)
VENDIBLE PRODUCT SIZE**

Width	min. 52 mm	max. 67 mm
Depth	min. 40 mm	max. 47 mm
Height	min. 85 mm	max. 134 mm
Weight	min. 213 g	max. 400 g

Please note: The above dimensions are for reference only.
Some products, although within the above dimensions, may be difficult to vend due to its shape.
Please vend test products before filling machine.

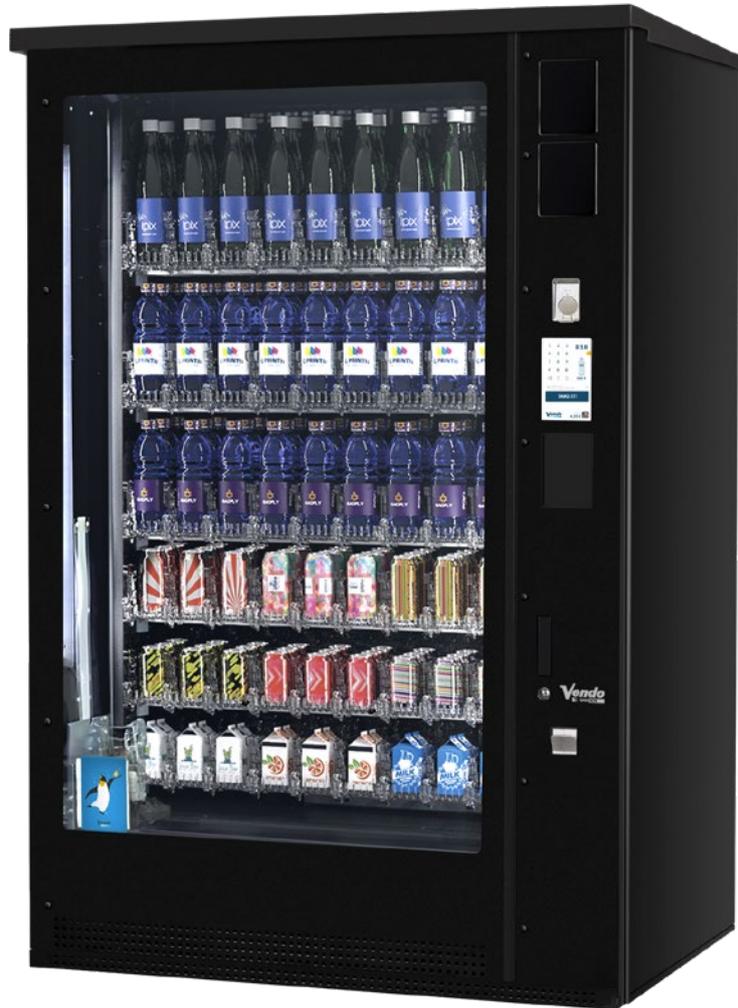

G-Drink DT 9 OD
Vertical Outdoor

G-DRINK TOUCH OUTDOOR

Outdoor refreshment at your fingertips

When premium usability meets smart outdoor vending: meet G-Drink Touch Outdoor, the new concept developed by SandenVendo to keep up with the new generation of vending users and their purchasing habits.

The new G-Drink Touch Outdoor represents a smart way to boost, ease and fasten your vending sales thanks to an intuitive, user-friendly touch screen designed to indulge customers into multi-purchasing operations while showcasing branded offers and nutrition facts. Equipped with premium anti-vandal and waterproof features for outdoor usage, serving cold drinks has never been easier.



G-DRINK 9
OUTDOOR TOUCH
DT9 OD



G-DRINK 6
OUTDOOR TOUCH
DT6 OD

DIMENSIONS H x W x D	1875* x 1260 x 1010 mm	1875* x 990 x 1010 mm
WEIGHT (NET - Standard machine without options)	410 kg	350 kg
NO. OF SELECTIONS PER SHELF	9	6
NO. OF SHELVES	Standard 5 / Max. 7	Standard 5 / Max. 7
NO. OF SELECTIONS	Standard 45 / Max. 63	Standard 30 / Max. 42
DISPLAY	7" Touch screen	7" Touch screen
MAX. CAPACITY (0,33 l CANS)	504	336
MAX. CAPACITY (0,50 l PET BOTTLES)	360	240
PROTOCOL	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic
COOLING UNIT		
INTERNAL TEMPERATURE RANGE	+2°C up to +10°C	+2°C up to +10°C
AMBIENT TEMPERATURE RANGE	-15°C up to +32°C	-15°C up to +32°C
MAX. POWER CONSUMPTION	540 W	540 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz
ENERGY CLASS		
ENERGY CONSUMPTION (kWh/annum)	2584	2619

*With adjustable leveling screw.



OUTDOOR FEATURES

- Front glass protection
- Roof
- Thermal magnetic circuit breaker
- Temperature controller for outdoor
- Cooling unit with heater anti-freeze function (works also outside temperature below zero)
- Waterproof IP34
- Anti-vandalism (coin insert, key pad and coin-return)
- Lock protection
- Heated glass anti-condensation
- An excellent led illumination also in dark



OPTION LIST

- Special coded lock (Rielda)
- Lock protection
- Security cash box system
- Wall/floor fixing kit
- Payment system
- Kit EVA DTS
- Various fitting kits
- Customization
- Customized cabinet colour


STANDARD COLOUR

Black ●



PET BOTTLES, GLASS BOTTLES, CANS VENDIBLE PRODUCT SIZE


Diameter	min. 43.5 mm	max. 73 mm
Height	min. 88 mm	max. 285 mm
Weight	min. 185 g	max. 653 g (980 g x6F)



CARTON PACKS (BRICK) VENDIBLE PRODUCT SIZE

Width	min. 52 mm	max. 67 mm
Depth	min. 40 mm	max. 47 mm
Height	min. 85 mm	max. 134 mm
Weight	min. 213 g	max. 400 g

Please note: The above dimensions are for reference only. Some products, although within the above dimensions, may be difficult to vend due to its shape. Please vend test products before filling machine.

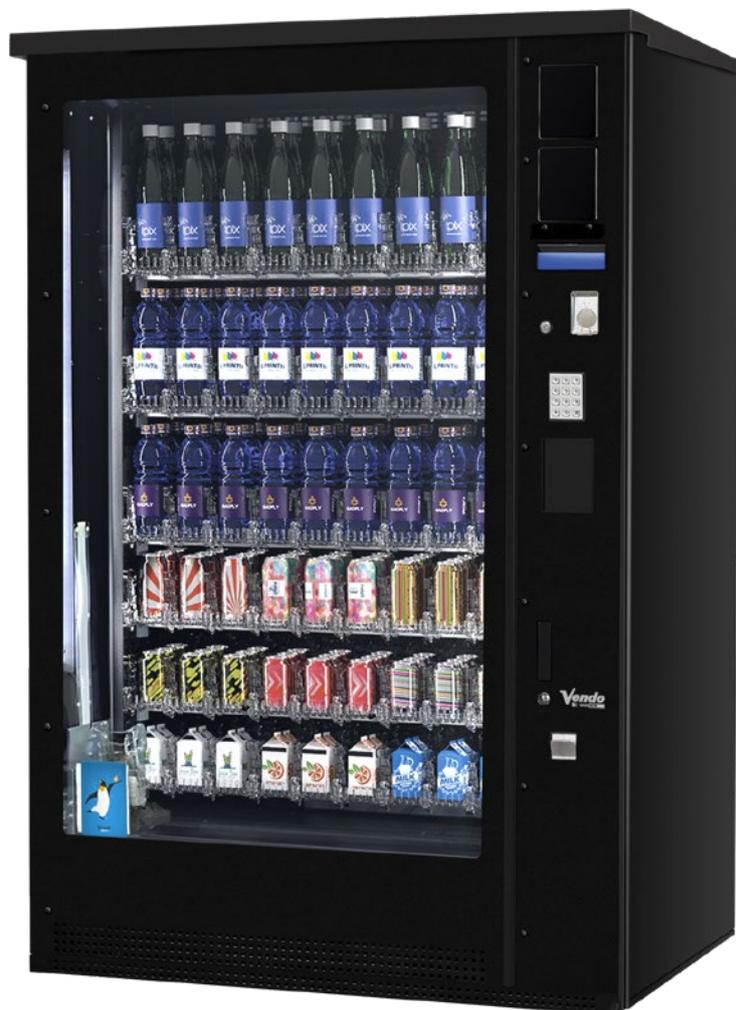

G-Drink DM 9 OD
Vertical Outdoor

G-DRINK OUTDOOR

Outdoor refreshment

The Outdoor, IP34 certified waterproof version of SandenVendo's popular G-Drink model combines all the utmost innovations of a premium automatic vending machine with the newly-developed features required for outdoor usage including an anti-condensation heated glass, a roof and an anti-vandal front door for further protection.

Thanks to its thermal-magnetic circuit breaker and its anti-freezing function with temperature control specially designed for outdoor application, G-Drink Outdoor can also operate also below-zero temperature conditions while its LED illumination system serves as an impulse sales ally during shop-closing hours.



**G-DRINK 9
OUTDOOR
DM9 OD**



**G-DRINK 6
OUTDOOR
DM6 OD**

DIMENSIONS H x W x D	1875* x 1260 x 1010 mm	1875* x 990 x 1010 mm
WEIGHT (NET - Standard machine without options)	410 kg	350 kg
NO. OF SELECTIONS PER SHELF	9	6
NO. OF SHELVES	Standard 5 / Max. 7	Standard 5 / Max. 7
NO. OF SELECTIONS	Standard 45 / Max. 63	Standard 30 / Max. 42
MAX. CAPACITY (0,33 l CANS)	504	336
MAX. CAPACITY (0,50 l PET BOTTLES)	360	240
PROTOCOL	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic
COOLING UNIT		
INTERNAL TEMPERATURE RANGE	+2°C up to +10°C	+2°C up to +10°C
AMBIENT TEMPERATURE RANGE	-15°C up to +32°C	-15°C up to +32°C
MAX. POWER CONSUMPTION	540 W	540 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz
ENERGY CLASS		
ENERGY CONSUMPTION (kWh/annum)	2584	2003

* With adjustable leveling screw.



OUTDOOR FEATURES

- Front glass protection
- Roof
- Thermal magnetic circuit breaker
- Temperature controller for outdoor
- Cooling unit with heater anti-freeze function (works also outside temperature below zero)
- Waterproof IP34
- Anti-vandalism (coin insert, key pad and coin-return)
- Lock protection
- Heated glass anti-condensation
- An excellent led illumination also in dark



OPTION LIST

- Special coded lock (Rielda)
- Lock protection
- Security cash box system
- Wall/floor fixing kit
- Payment system
- Kit EVA DTS
- Various fitting kits
- Customization
- Customized cabinet colour


STANDARD COLOUR

Black ●



**PET BOTTLES, GLASS BOTTLES, CANS
VENDIBLE PRODUCT SIZE**

Diameter	min. 43.5 mm	max. 73 mm
Height	min. 88 mm	max. 285 mm
Weight	min. 185 g	max. 653 g (980 g x6F)



**CARTON PACKS (BRICK)
VENDIBLE PRODUCT SIZE**

Width	min. 52 mm	max. 67 mm
Depth	min. 40 mm	max. 47 mm
Height	min. 85 mm	max. 134 mm
Weight	min. 213 g	max. 400 g

Please note: The above dimensions are for reference only. Some products, although within the above dimensions, may be difficult to vend due to its shape. Please vend test products before filling machine.



GSnack

by SandenVendo



FLEXIBLE VENDING SYSTEM

Our Belt, Rotary and Spiral modular delivery systems represent the most flexible solution for dispensing a vast array of edible and merchandising items by simply adjusting each module according to each product size.



COUPLING SYSTEM

G-Snack spirals can be easily positioned at 8 different angles for quick spiral orientation, without removing it at all. Simply turn the spiral to set the ideal position.



RELIABLE

An advanced safety health temperature control can be programmed for individual selections. Optic sensor detects the product delivery and assures by an extra rotation in case not detected.



ECO-FRIENDLY SOLUTION

Crafted with a patented HC cooling unit (R290) Natural Refrigerants to reduce the direct and indirect emission of greenhouse gases and less impact on GWP.

INDOOR PRODUCT RANGE




G-SNACK
DESIGN TOUCH




G-SNACK
DESIGN




G-SNACK
STANDARD




G-SNACK
BUDGET




G-SNACK
EVOLUTION




SNACK UNO
TABLE TOP

OUTDOOR PRODUCT RANGE







G-SNACK
OUTDOOR TOUCH




G-SNACK
OUTDOOR

CHOOSE AMONG 3 DIFFERENT VENDING DELIVERY SYSTEMS

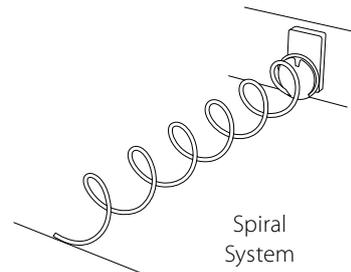



G-Snack XL Master

G-SNACK TOUCH

Essentials at your fingertips

Versatile and smart, G-Snack Touch is the automatic vending machine designed to increase your profits in the most effortless and intuitive way possible by combining top-notch technology with SandenVendo's flagship cooling units.

G-Snack Touch, equipped with a user-friendly and commercially advantageous touch display with a multi-selection feature to persuade clients into buying more products, can accommodate a large variety of cold drinks, snacks and foods including fresh goods such as lunch boxes or salads on the go; its extreme flexibility allows G-Snack Touch to be suitable for installation inside automated shops as an Extra-Vending machine that dispenses merchandising items.



**G-SNACK TOUCH
TEN (X) MASTER
STX**

**G-SNACK TOUCH
EIGHT (VIII) MASTER
ST8**

**G-SNACK TOUCH
SIX (VI) MASTER
ST6**

DIMENSIONS H x W x D	1830* x 1125 x 845 mm	1830* x 980 x 845 mm	1830* x 830 x 845 mm
WEIGHT (NET - Standard machine without options)	340 kg	310 kg	275 kg
NO. OF SELECTIONS PER SHELF	10	8	6
NO. OF SHELVES	Standard 6 / Max. 7	Standard 6 / Max. 7	Standard 6 / Max. 7
NO. OF SELECTIONS	Max. 70	Max. 56	Max. 42
DISPLAY	7" Touch screen	7" Touch screen	7" Touch screen
PROTOCOL	Executive / MDB	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic	Electronic
COOLING UNIT			
INTERNAL TEMPERATURE RANGE	+2°C up to +18°C	+2°C up to +18°C	+2°C up to +18°C
MAX. POWER CONSUMPTION	600 W	600 W	550 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz	230/240 V - 50 Hz
CLIMATE CLASS	ST (+16°C up to +38°C)	ST (+16°C up to +38°C)	ST (+16°C up to +38°C)
ENERGY CLASS	 Cat. 2	 Cat. 3	 Cat. 4
ENERGY CONSUMPTION (kWh/annum)	1087 Cat. 2	1666 Cat. 3	1607 Cat. 4

* With adjustable feet



OPTION LIST

- Speedy lift
- E-labeling
- Rotary & Belt System
- Kit sandwich/baguette
- Motorized lock delivery eyelet
- Special coded lock (Rielda)
- Lock protection
- Safety slide coin insert
- Security cash box system
- Wall/floor fixing kit
- Payment system
- Kit EVA DTS
- Various fitting kits
- Customization
- Customized cabinet colour

STANDARD COLOUR

Black ●



DUO SYNCHRO SPIRAL
An innovative system with a double motor drive that rotates perfectly synchronized in distance. Ideal for wide and bulky products.



SPEEDY LIFT
Delicate and/or fragile products can be sold at eye-height position! Speedy delivery of the products is guaranteed!



G-Snack XL Master

G-SNACK DESIGN

Snacking? Solved.

Beyond simple product selection, G-Snack Design is such a versatile automatic vending machine that opens up vast opportunities to customers who are interested in engaging with a solid wealth of retail possibilities.

The new model, G-Snack XII, allows for flexible products assortment by favouring up to 84 selections with a 6+6 double tray: so spacious and versatile that can be considered as an automated mini convenience store open 24/7.

Moreover, G-Snack Design 6 and 8 are designed to pass through narrow passages thanks to their modular construction which separates the main body from the payment column.

The extreme versatility of this vending machine allows for accommodating a large array of F&B goods as well as Extra-Vending merchandise of various sizes and shapes: equipped with a motorized opening delivery eyelet, G-Snack XII can effortlessly handle and deliver bulk-size products.



**G-SNACK DESIGN
TEN (X) MASTER
SDX**

**G-SNACK DESIGN
EIGHT (VIII) MASTER
SC8**

**G-SNACK DESIGN
SIX (VI) MASTER
SC6**

DIMENSIONS H x W x D	1830* x 1125 x 845 mm	1830* x 980 x 845 mm	1830* x 830 x 845 mm
WEIGHT (NET - Standard machine without options)	340 kg	310 kg	275 kg
NO. OF SELECTIONS PER SHELF	10	8	6
NO. OF SHELVES	Standard 6 / Max. 7	Standard 6 / Max. 7	Standard 6 / Max. 7
NO. OF SELECTIONS	Max. 70	Max. 56	Max. 42
PROTOCOL	Executive / MDB	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic	Electronic
COOLING UNIT			
INTERNAL TEMPERATURE RANGE	+2°C up to +18°C	+2°C up to +18°C	+2°C up to +18°C
MAX. POWER CONSUMPTION	600 W	600 W	550 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz	230/240 V - 50 Hz
CLIMATE CLASS	ST (+16°C up to +38°C)	ST (+16°C up to +38°C)	ST (+16°C up to +38°C)
ENERGY CLASS	 Cat. 2	 Cat. 3	 Cat. 4
ENERGY CONSUMPTION (kWh/annum)	1087 Cat. 2	1666 Cat. 3	1607 Cat. 4

*With adjustable feet



OPTION LIST

- Speedy lift
- E-labeling
- Rotary & Belt System
- Kit sandwich/baguette
- Motorized lock delivery eyelet
- Special coded lock (Rielda)
- Lock protection
- Safety slide coin insert
- Security cash box system
- Wall/floor fixing kit

- Payment system
- Kit EVA DTS
- Various fitting kits
- Customization
- Customized cabinet colour

STANDARD COLOUR

Black ●



DUO SYNCHRO SPIRAL
An innovative system with a double motor drive that rotates perfectly synchronized in distance. Ideal for wide and bulky products.



SPEEDY LIFT
Delicate and/or fragile products can be sold at eye-height position! Speedy delivery of the products is guaranteed!



G-Snack SM8

G-SNACK STANDARD

Proper snacking attitude

Backed with SandenVendo's expertise in thermo-dynamics and cooling technologies, G-Snack Standard is the automatic vending machine equipped with the same software and technology features of the Design line, at a budget.

Spacious and versatile as every G-Snack model, the new G-Snack Standard XII model can accommodate up to 84 selections including a vast assortment of bulk-size and Extra-Vending merchandises thanks to an extremely flexible tray configuration system, turning this automatic vending machine into a mini-market open 24/7.



**G-SNACK STANDARD
TWELVE (XII) MASTER
MLL**

**G-SNACK STANDARD
TEN (X) MASTER
SMX**

**G-SNACK STANDARD
EIGHT (VIII) MASTER
SM8**

**G-SNACK STANDARD
SIX (VI) MASTER
SM6**

DIMENSIONS H x W x D	1830* x 1290 x 900 mm	1830* x 1125 x 845 mm	1830* x 980 x 845 mm	1830* x 830 x 845 mm
WEIGHT (NET - Standard machine without options)	410 kg	340 kg	310 kg	275 kg
NO. OF SELECTIONS PER SHELF	12 (6+6)	10	8	6
NO. OF SHELVES	Standard 6 / Max. 7			
NO. OF SELECTIONS	Max. 84	Max. 70	Max. 56	Max. 42
PROTOCOL	Executive / MDB	Executive / MDB	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic	Electronic	Electronic
COOLING UNIT				
INTERNAL TEMPERATURE RANGE	+2°C up to +18°C			
MAX. POWER CONSUMPTION	460 W	600 W	600 W	550 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz	230/240 V - 50 Hz
CLIMATE CLASS	ST (+16°C up to +38°C)			
ENERGY CLASS	 Cat. 2	 Cat. 3	 Cat. 4	 Cat. 2
ENERGY CONSUMPTION (kWh/annum)	1288 Cat. 2	1762 Cat. 3	1674 Cat. 4	1087 Cat. 2
		1666 Cat. 3	1607 Cat. 4	1231 Cat. 2
				1569 Cat. 3
				1521 Cat. 4
				1231 Cat. 2
				1703 Cat. 3
				1703 Cat. 4

* With adjustable feet.



OPTION LIST

- Speedy lift (SMX-SM8-SM6)
- E-labeling
- Rotary & Belt System
- Kit sandwich/baguette
- Motorized lock delivery eyelet
- Special coded lock (Rielda)
- Lock protection
- Safety slide coin insert
- Security cash box system
- Wall/floor fixing kit
- Payment system
- Kit EVA DTS
- Various fitting kits
- Customization
- Customized cabinet colour

STANDARD COLOUR

Black ●



DUO SYNCHRO SPIRAL
An innovative system with a double motor drive that rotates perfectly synchronized in distance. Ideal for wide and bulky products.



SPEEDY LIFT
Delicate and/or fragile products can be sold at eye-height position! Speedy delivery of the products is guaranteed!



G-Snack Budget Master 8

G-SNACK BUDGET

Quality beyond budget

The key to success lies in simplicity, and G-Snack Budget is the automatic vending machine that knows best. A one-of-a-kind practical, versatile and strong vending machine that boasts all of SandenVendo's expertise in thermo-dynamics and cooling systems while selling at a smaller price.

Its pre-cooling area allows for storing products at a ready-to-sell temperature while its large LCD display, LED illumination system and top-notch energy-saving program come as standard features: not so budget after all!

**G-SNACK BUDGET
MASTER
BS8**

DIMENSIONS H x W x D	1830 x 885 x 780 mm
WEIGHT (NET - Standard machine without options)	250 kg
NO. OF SELECTIONS PER SHELF	8
NO. OF SHELVES	Standard 6 / Max. 7
NO. OF SELECTIONS	Max. 56
PROTOCOL	Executive / MDB
COOLING SYSTEM CONTROL	Electronic
COOLING UNIT	
INTERNAL TEMPERATURE RANGE	+8°C up to +18°C
MAX. POWER CONSUMPTION	400 W
POWER SUPPLY	230/240 V - 50 Hz
CLIMATE CLASS	ST (+16°C up to +38°C)
ENERGY CLASS	
ENERGY CONSUMPTION (kWh/annum)	1254



OPTION LIST

- Rotary & Belt System
- Kit sandwich/baguette
- Optical sensor for product detection
- Motorized lock delivery eyelet
- Special coded lock (Rielda)
- Safety slide coin insert
- Security cash box system
- Wall/floor fixing kit
- Payment system
- Various fitting kits
- Customization
- Customized cabinet colour

STANDARD COLOUR

Black ●



1. **DOUBLE CUT OUT**
Ready for Cashless and Bill-validator installation
2. **DISPLAY**
Easy to read, well illuminated character
3. **COIN INSERT**
Standard Slot or Safety slide coin insert as option (easy to change)
4. **KEY PAD**
Telephonic Key pad in plastic or Metal anti-vandalism as option
5. **FLAP COIN RETURN**
A simple flap opening with anti-theft system
6. **REMOVABLE COOLING UNIT AND LOWER GRID**
Easy removing lower liner and grid to access and cleaning of Cooling unit
7. **DOUBLE GLASS PANEL**
8. **LED ILLUMINATION**
LED as standard, illumination from top inner cell
9. **POP-OUT LEVER OPENING**
Easy and smooth door opening with a pop-out lever
10. **CABINET**
A fully insulated cabinet, foamed with Eco compatible components.
11. **PRODUCT STORAGE AREA**
Products can be stored in pre-cooling area



G-Snack Evolution

G-SNACK EVOLUTION

The ultimate vending machine

Conceived as the future of SandenVendo snack vending, G-Snack Evolution is the innovative automatic vending machine crafted with a motorized central delivery eyelet designed to provide for an ergonomic, user-friendly and smart vending machine model.

EV8 has 8 selections per shelf and presents an internal temperature range from +2°C to +10°C that is ideal for drinks, snacks and various types of food including vegetables, fruit and fresh eggs, safely delivered thanks to the central delivery eyelet.

Its extreme versatility allows G-Snack Evolution to be suitable for installation inside automated shops as an Extra-Vending machine that dispenses merchandising items.



**G-SNACK
EVOLUTION
EV8**



**G-SNACK
EVOLUTION
EVX**

DIMENSIONS H x W x D	1830* x 980 x 890 mm	1830* x 1125 x 890 mm	
WEIGHT (NET - Standard machine without options)	305 kg	340 kg	
NO. OF SELECTIONS PER SHELF	8	10	
NO. OF SHELVES	Standard 6 / Max. 7	Standard 6 / Max. 7	
NO. OF SELECTIONS	Max. 56	Max. 70	
DISPLAY	-	7" Touch screen	
PROTOCOL	Executive / MDB	Executive / MDB	
COOLING SYSTEM CONTROL	Electronic	Electronic	
COOLING UNIT			
INTERNAL TEMPERATURE RANGE	+2°C up to +10°C	+2°C up to +18°C	
MAX. POWER CONSUMPTION	650 W	650 W	
POWER SUPPLY	220/240 V - 50/60 Hz	230/240 V - 50/60 Hz	
CLIMATE CLASS	ST (+16°C up to +38°C)	ST (+16°C up to +38°C)	
ENERGY CLASS	 Cat. 2	 Cat. 3	 Cat. 4
ENERGY CONSUMPTION (kWh/annum)	975 Cat. 2	1569 Cat. 3	1521 Cat. 4

* With adjustable feet



OPTION LIST

- E-labeling
- Rotary & Belt System
- Kit sandwich/baguette
- Special coded lock (Rielda)
- Safety slide coin insert
- Security cash box system
- Wall/floor fixing kit
- Payment system
- Kit EVA DTS
- Various fitting kits
- Customization
- Customized cabinet colour

STANDARD COLOUR

Black ●

CAPACIOUS & FLEXIBLE

The G-Snack Evolution has a capacious motorized central delivery eyelet. Bulky products i.e. sandwich, baguette, family size biscuits can be delivered without any handling problem. Combined with Sanden Synchro spiral, the machine can deliver the products flexibly and unconventionally.

ERGONOMIC DESIGN

It was developed by first considering the well-being of the end user. An amazing concept achieved with creative engineering to yield this novel machine.





INTUITIVE & SIMPLE

An attractive machine with solid structure offers easy-to-follow intuitive functions. Simple and flexible operation of G-Snack always comes as standard. Versatile and user-friendly programming.

RELIABLE

The state-of-art cooling system and its reliability is the SandenVendo's strength that stands out in the market. Environmental friendly features through intelligent temperature control and energy saving program.

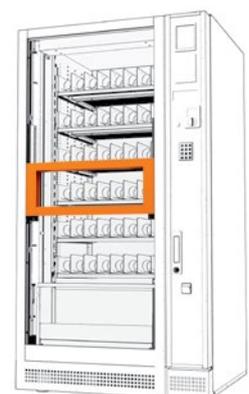

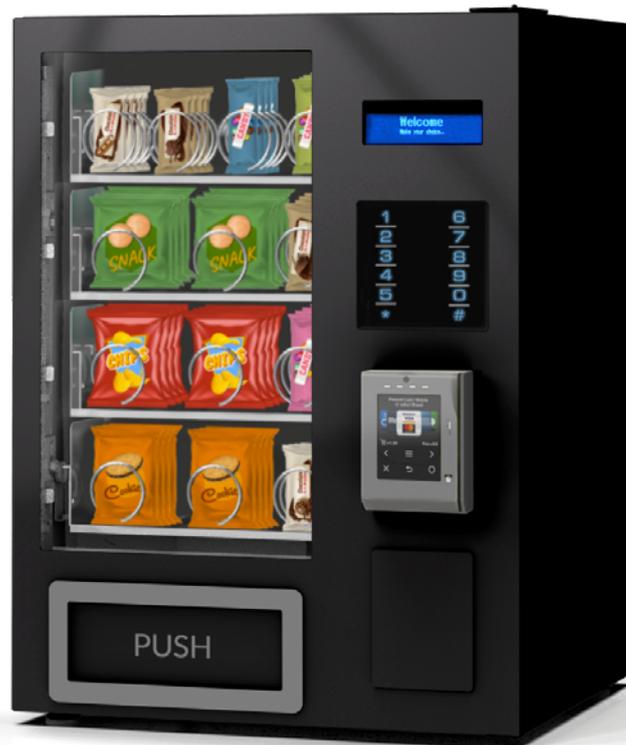

SnackUNO
(Payment system as option)

■ SNACKUNO TABLETOP


Enhance your downtime

SnackUNO is SandenVendo's most compact, reliable and flexible countertop vending machine; available in black or white monochrome, this compact automatic vending machine is backed with a spacious product storage capability.

Equipped with complimentary digital purchasing methods, SnackUNO's versatility makes it an ideal solution for meeting rooms or hotel halls: snacks, hotel amenities, tobacco or even alcoholic products can be displayed inside SnackUNO thanks to the Age Control feature available as an option for installation.

**SNACKUNO
TABLETOP
SSP**

DIMENSIONS H x W x D	700 x 525 x 475 mm
WEIGHT (NET/GROSS - Standard machine without options)	50 kg / 55 kg
NO. OF SELECTIONS PER SHELF	4
NO. OF SHELVES	Standard 3 / Max. 4
NO. OF SELECTIONS	Max. 16
DISPLAY	LCD
PROTOCOL	Executive / MDB
MAX. POWER CONSUMPTION	50 W
POWER SUPPLY	220 V / 50 Hz

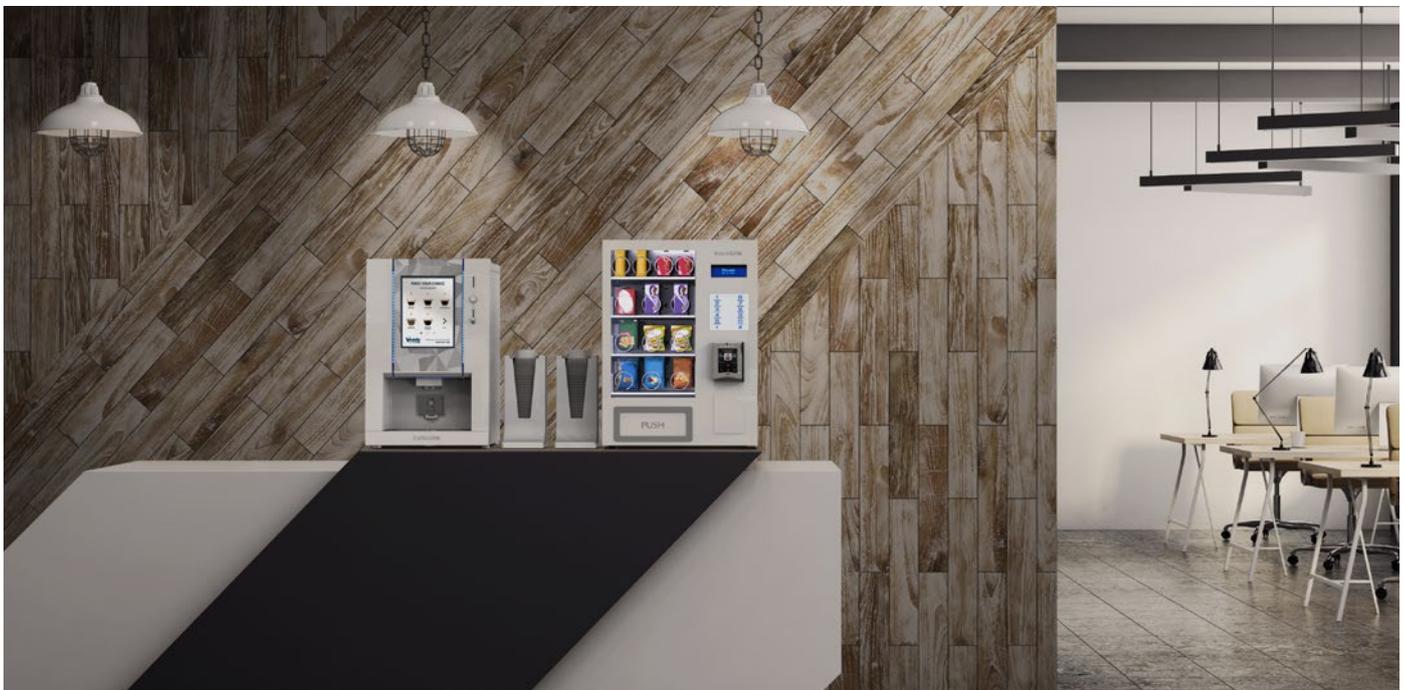

OPTION LIST

- Optical sensor for product detection
- Special coded lock (Rielda)
- Payment system
- Payment tower module
- Customization
- Customized cabinet colour

STANDARD COLOURS

Black ● | White ○





G-Snack ST8 OD

G-SNACK TOUCH OUTDOOR

Designed for workers, joggers and wanderers

Once again, the most versatile vending machine of all times has just outdid itself. Now available with top-notch touch screen display designed for quick and multi-purchasing operations, G-Snack Touch Outdoor represents a safe, smart and innovative choice for satisfying large array of customers needs.

From drinks and edibles of all sorts, including freshly harvested products for a healthy lunch in the park or a last-minute family picnic, G-Snack Touch Outdoor can accommodate a broad variety of products including Extra Vending items such as protection materials, hi-tech devices or pet food: you decide!



**G-SNACK TOUCH
TEN (X) OUTDOOR
STX OD**

**G-SNACK TOUCH
EIGHT (VIII) OUTDOOR
ST8 OD**

**G-SNACK TOUCH
SIX (VI) OUTDOOR
ST6 OD**

DIMENSIONS H x W x D	1900 x 1200 x 1010 mm	1900 x 1030 x 1010 mm	1900 x 890 x 1010 mm
WEIGHT (NET - Standard machine without options)	400 kg	350 kg	325 kg
NO. OF SELECTIONS PER SHELF	10	8	6
NO. OF SHELVES	Standard 6 / Max. 7	Standard 6 / Max. 7	Standard 6 / Max. 7
NO. OF SELECTIONS	Max. 70	Max. 56	Max. 42
DISPLAY	7" Touch screen	7" Touch screen	7" Touch screen
PROTOCOL	Executive / MDB	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic	Electronic
COOLING UNIT			
INTERNAL TEMPERATURE RANGE	+2°C up to +18°C	+2°C up to +18°C	+2°C up to +18°C
AMBIENT TEMPERATURE RANGE	-15°C up to +32°C	-15°C up to +32°C	-15°C up to +32°C
MAX. POWER CONSUMPTION	540 W	540 W	540 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz	230/240 V - 50 Hz
ENERGY CLASS	 Cat. 2	 Cat. 3	 Cat. 4
ENERGY CONSUMPTION (kWh/annum)	1718 Cat. 2	2479 Cat. 3	2443 Cat. 4



OUTDOOR FEATURES

- Armoured front door
- Roof
- Thermal magnetic circuit breaker
- Temperature controller for outdoor
- Cooling unit with heater anti-freeze function (works also outside temperature below zero)
 - Waterproof IP34
 - Anti-vandalism (coin insert, key pad and coin-return)
 - Lock protection
 - Heated glass anti-condensation
- An excellent led illumination also in dark



OPTION LIST

- Speedy lift
- E-labeling
- Rotary & Belt System
- Kit sandwich/baguette
- Motorized lock delivery eyelet
- Special coded lock (Rielda)
- Security cash box system
- Wall/floor fixing kit
- Payment system
- Kit EVA DTS
- Various fitting kits
- Customization
- Customized cabinet colour

STANDARD COLOUR

Black ●



SPEEDY LIFT

Delicate and/or fragile products can be sold at eye-height position! Speedy delivery of the products is guaranteed!



G-Snack SM8 OD

G-SNACK OUTDOOR

Outdoor snacking? Solved.

Crafted with premium materials and equipped with top-notch technological features, G-Snack Outdoor represents the safest and smartest way to pursue your automatic outdoor vending business.

Backed with SandenVendo's expertise in thermo-dynamics and cooling systems, G-Snack Outdoor comes with a thermal-magnetic circuit breaker and a temperature controller specially designed to operate under severe weather conditions. IP34 waterproof certified, this model comes with a heated anti-condensation glass, a new anti-vandal design and a smart LED illumination system.



**G-SNACK
TEN (X) OUTDOOR
SMX OD**

**G-SNACK
EIGHT (VIII) OUTDOOR
SM8 OD**

**G-SNACK
SIX (VI) OUTDOOR
SM6 OD**

DIMENSIONS H x W x D	1900 x 1200 x 1010 mm	1900 x 1030 x 1010 mm	1900 x 890 x 1010 mm
WEIGHT (NET - Standard machine without options)	400 kg	350 kg	325 kg
NO. OF SELECTIONS PER SHELF	10	8	6
NO. OF SHELVES	Standard 6 / Max. 7	Standard 6 / Max. 7	Standard 6 / Max. 7
NO. OF SELECTIONS	Max. 70	Max. 56	Max. 42
PROTOCOL	Executive / MDB	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic	Electronic
COOLING UNIT			
INTERNAL TEMPERATURE RANGE	+2°C up to +18°C	+2°C up to +18°C	+2°C up to +18°C
AMBIENT TEMPERATURE RANGE	-15°C up to +32°C	-15°C up to +32°C	-15°C up to +32°C
MAX. POWER CONSUMPTION	540 W	540 W	540 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz	230/240 V - 50 Hz
ENERGY CLASS	Cat. 2 Cat. 3 Cat. 4	Cat. 2 Cat. 3 Cat. 4	Cat. 2 Cat. 3 Cat. 4
ENERGY CONSUMPTION (kWh/annum)	1718 Cat. 2 2479 Cat. 3 2443 Cat. 4	1492 Cat. 2 2151 Cat. 3 2122 Cat. 4	1963 Cat. 2 2200 Cat. 3 2009 Cat. 4



OUTDOOR FEATURES

- Armored front door
- Roof
- Thermal magnetic circuit breaker
- Temperature controller for outdoor
- Cooling unit with heater anti-freeze function (works also outside temperature below zero)
- Waterproof IP34
- Anti-vandalism (coin insert, key pad and coin-return)
- Lock protection
- Heated glass anti-condensation
- An excellent led illumination also in dark



OPTION LIST

- Speedy lift
- E-labeling
- Rotary & Belt System
- Kit sandwich/baguette
- Motorized lock delivery eyelet
- Special coded lock (Rielda)
- Security cash box system
- Wall/floor fixing kit
- Payment system
- Kit EVA DTS
- Various fitting kits
- Customization
- Customized cabinet colour


STANDARD COLOUR

Black ●



SPEEDY LIFT

Delicate and/or fragile products can be sold at eye-height position! Speedy delivery of the products is guaranteed!

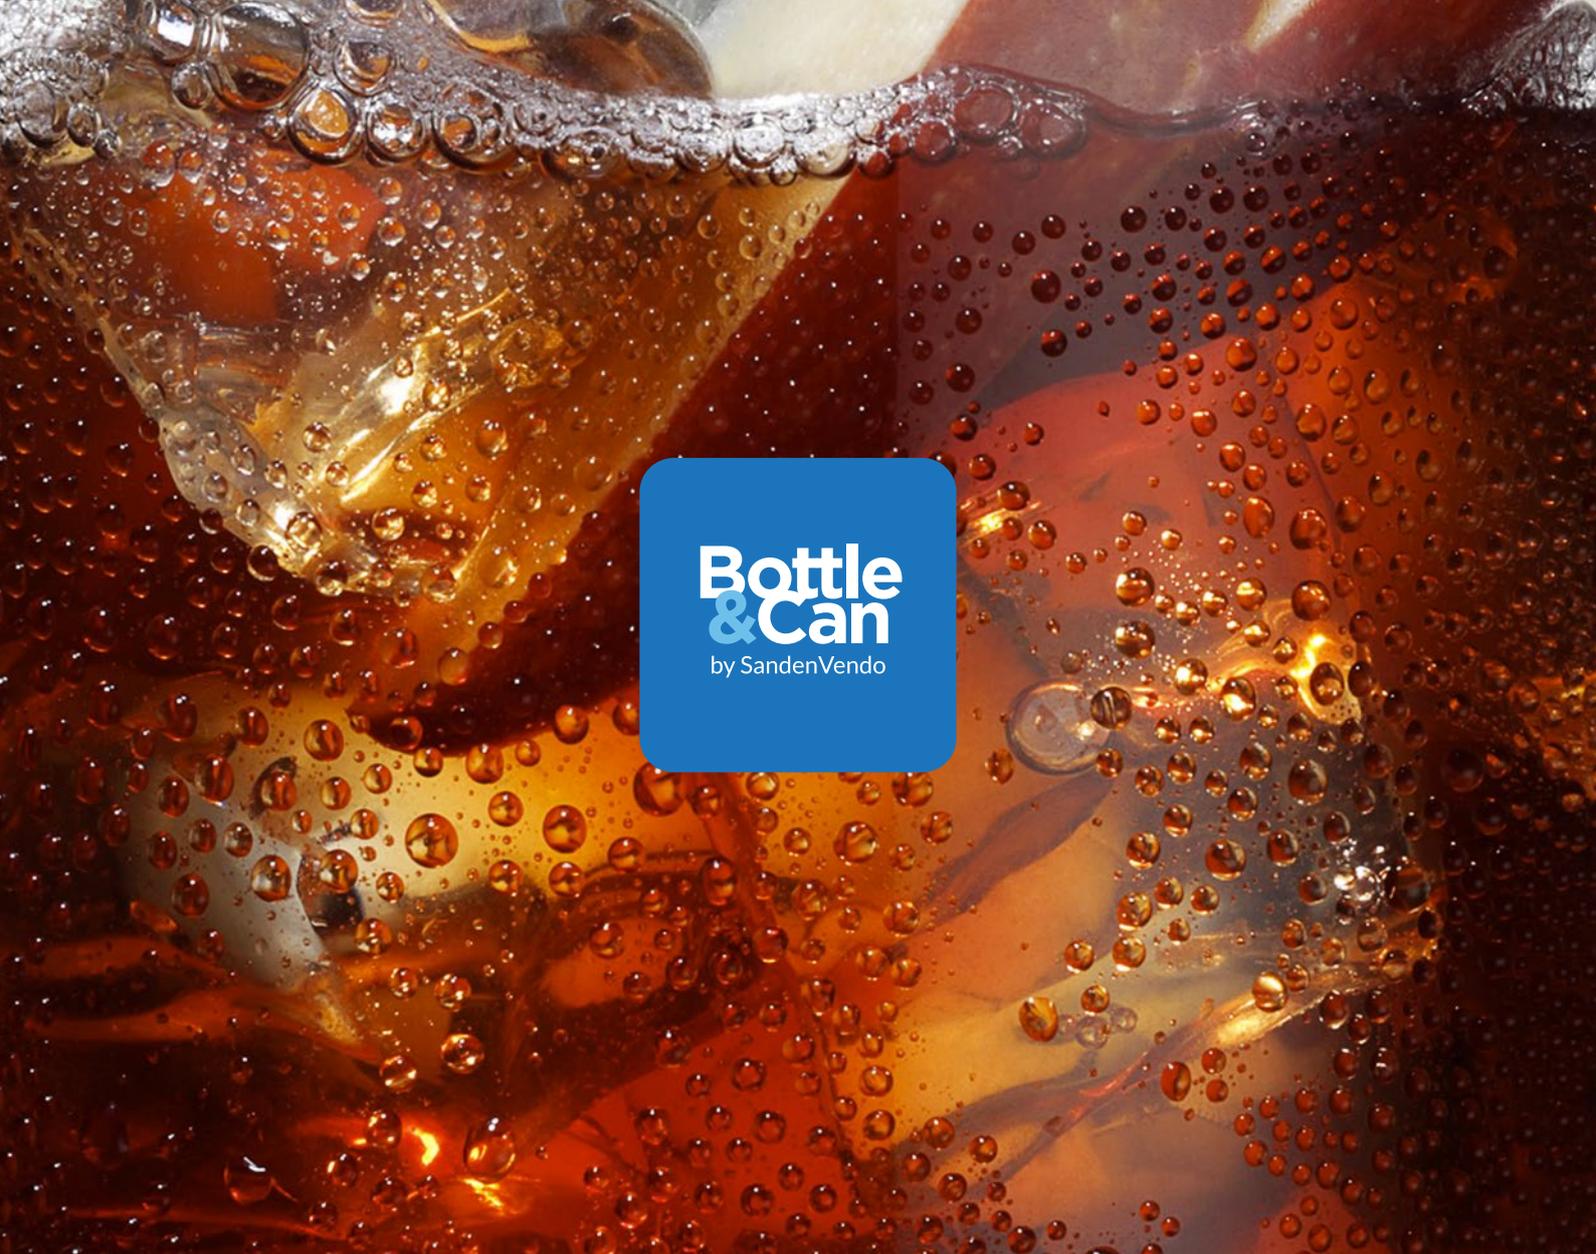

**Bottle
& Can**
by SandenVendo



OVER 30 YEARS GUARANTEED QUALITY

The SandenVendo column vendor excels at providing reliability. All the systems and mechanisms have been fully tested during SandenVendo's long history of production, craftsmanship and expertise, however they are built based on constancy and continuous effort to deliver the best.



SAVING

The SandenVendo Bottle & Can is a real value for money product. Backed by long experience the machine has been developed with a leaner design, keeping only what is necessary. The cooling unit is one of the best on the market, also saving maintenance costs.



PLUG AND PLAY

Simplicity is the key these models. Simple functions, user-friendly programming and fast product loading, no complications at all and the machine is almost instantly ready to sale.



ECO-FRIENDLY SOLUTION

Crafted with a patented HC cooling unit (R290) Natural Refrigerants to reduce the direct and indirect emission of greenhouse gases and less impact on GWP

BOTTLE & CAN PRODUCT RANGE



B&C DESIGN
NARROWSTACK



B&C FLEX
FLEXSTACK



M-C 48

B&C DESIGN NARROWSTACK

The most eco-friendly vending solution

SandenVendo owes its popularity to a reliable mechanism technology and the premium cooling units applied on each of its vending models since 1930. The Bottle&Can automatic vending machine represents a true flagship in terms of quality standards and durability: this simple yet functional column vendor today is upgraded with modern features and a user-friendly interface.

In addition, always considering environmental sustainability, B&C Design Narrowstack has been developed with an HC (R290) Hydro Carbon version, pursuing the commitment to employing natural refrigerants on our vending machines.



**B&C DESIGN
NARROWSTACK 10
L-C4X**

**B&C DESIGN
NARROWSTACK 8
M-C48**

**B&C DESIGN
NARROWSTACK 7
S-C47**

**B&C DESIGN
NARROWSTACK 6
XS-C36**

DIMENSIONS H x W x D	1830 x 1015 x 955 mm	1830 x 850 x 955 mm	1830 x 750 x 955 mm	1830 x 650 x 800 mm
WEIGHT (NET - Standard machine without options)	375 kg	340 kg	300 kg	280 kg
NO. OF SELECTIONS / COLUMNS	10	8	7	6
PROTOCOL	Executive / MDB	Executive / MDB	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic	Electronic	Electronic
COOLING UNIT				
PROGRAMMABLE TEMPERATURE RANGE	+1°C up to +25°C			
MAX. POWER CONSUMPTION	700 W	700 W	700 W	650 W
POWER SUPPLY	220/240 V - 50 Hz			
CLIMATE CLASS	N (+16°C up to +32°C)			
ENERGY CLASS				
ENERGY CONSUMPTION (kWh/annum)	991	974	927	889

CAPACITIES		L-C4X	M-C48	S-C47	XS-C36
PET BOTTLE 0,50 l	Ø 65 mm H 235 mm	340	272	238	102
SLIM CAN 0,25 l	Ø 53 mm H 135 mm	630	504	441	252
CAN 0,33 l	Ø 66 mm H 116 mm	680	544	476	306
SLEEK CAN 0,33 l	Ø 57,5 mm H 146 mm	570	456	399	228
PRODUCT DIMENSIONS	Diameter Ø	min 53 > max 70 mm			
	Height	min 80 > max 355 mm			
MECHANISM TYPE	Narrowstack	4D	4D	4D	3D

Please note: The above dimensions are for reference only.
Some products, although within the above dimensions, may be difficult to vend due to its shape.
Please vend test products before filling machine.




OPTION LIST

- Special coded lock (Rielda)
- Safety slide coin insert
- Security cash box system
- Wall/floor fixing kit
- Payment system
- DEX/UCS kit

- Various fitting kits
- Customization
- Customized cabinet colour

STANDARD COLOUR

Black ●

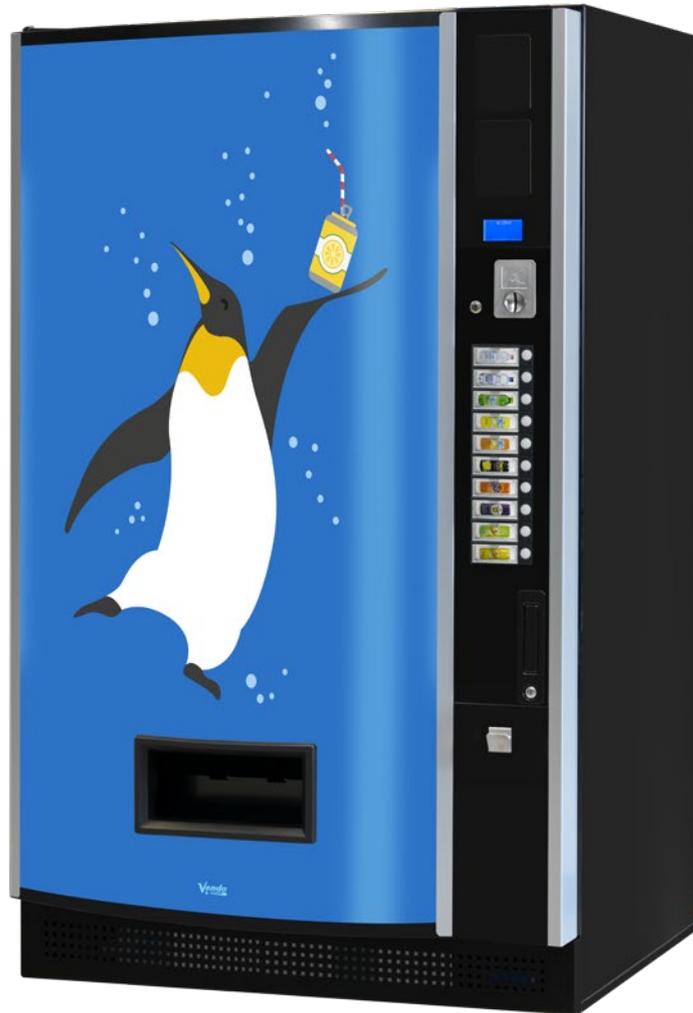

CFX

B&C DESIGN FLEXSTACK

The ultimate vending bargain

Backed with SandenVendo's experience in the vending industry including the patented top-notch cooling technologies applied on each vending machine produced, Bottle&Can Design Flexstack is an automatic vending machine developed to handle 1L and 1.5L bottles in the most effective and flexible way.


Thanks to an advanced cooling system that exploits HC (R290), a natural and eco-friendly refrigerant solution, B&C Design Flexstack is a simple, smart automatic vending machine that minimizes overall maintenance.

B&C DESIGN
FLEXSTACK
CFX-FLEX

DIMENSIONS H x W x D	1830 x 1015 x 955 mm
WEIGHT (NET - Standard machine without options)	375 kg
NO. OF SELECTIONS	10
NO. OF MODULES	from 5 to 7
PROTOCOL	Executive / MDB
COOLING UNIT	
PROGRAMMABLE TEMPERATURE RANGE	+1°C up to +25°C
MAX. POWER CONSUMPTION	700 W
POWER SUPPLY	220/240 V - 50 Hz
CLIMATE CLASS	N (+16°C up to +32°C)
ENERGY CLASS	
ENERGY CONSUMPTION (kWh/annum)	991

CAPACITIES: VENDABLE / PRE-COOL	WIDE STACK*	NARROW STACK**
CAN 0,33 l	87 / 3 (3D)	51 / 3 (3D)
PET BOTTLE 0,50 l	29 / 1 (1D)	17 / 1 (1D)
PET BOTTLE 1,00 l	22-24 / 1 (1D)	-
PET BOTTLE 1,50 l	16-18 / 1 (1D)	-

* WIDE STACK Product dimensions: Ø Min. 66 mm - Max. 90 mm, length 345 mm ** NARROW STACK Product dimensions: Ø Min. 53 mm - Max. 70 mm, length 355 mm
 N.B. Capacities will vary based on the shape and dimension of the product.

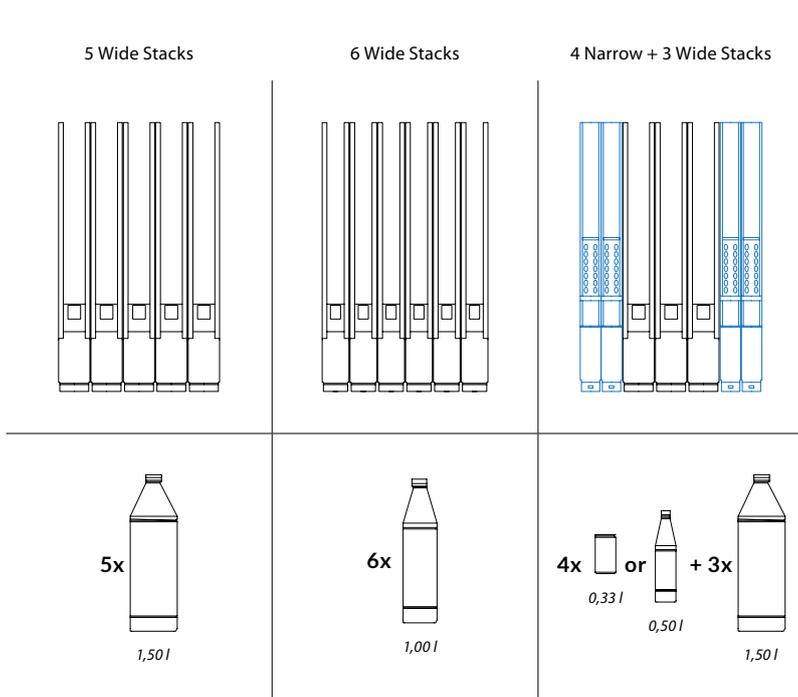

OPTION LIST

- Special coded lock (Rielda)
- Safety slide coin insert
- Security cash box system
- Wall/floor fixing kit
- Payment system
- DEX/UCS kit
- Various fitting kits
- Customization
- Customized cabinet colour
- STANDARD COLOUR**
Black ●

- ▶ Product diameters from 53 mm to 96 mm
- ▶ Combinative and convertible modules as you like
- ▶ High vend-mechanism reliability
- ▶ Easy and simple programming by using the direct selection buttons
- ▶ Easy convertible stacks (bottle to / from can)
- ▶ Double inner door (better insulation)
- ▶ Energy saving program
- ▶ Recommended for In-door use and Out-door kit available (option)
- ▶ Easy cleaning and maintenance for the cooling unit



SLAVE VERSIONS

To increase your vending capacity

SandenVendo's Slave models represent a smart solution for expanding any new or existing vending station.

Backed by SandenVendo's expertise in thermo-dynamics and cooling systems, **each Slave machine can be connected to any models with Touch screen display; G-Caffè UNI-Q TOUCH, G-Drink and G-Snack machine** that holds the selection panel and a single payment system.

Now available in a waterproof, anti-vandal Outdoor version, SandenVendo's Slave machines perform as extremely versatile business allies thanks to their ability to change and adapt to any vending need, including Extra Vending.

Try positioning the Slave machine next to a G-Caffè Touch and tempt clients into buying a snack to match their hot drink!



INDOOR PRODUCT RANGE



G-DRINK
DESIGN / STANDARD
SLAVE



G-SNACK
DESIGN / STANDARD
SLAVE



G-SNACK SLAVE
EVOLUTION



OUTDOOR PRODUCT RANGE



G-SNACK
OUTDOOR
SLAVE



G-Snack SS8

G-DRINK SLAVE

Your sleek vending ally

Designed to operate with any TOUCH series of G-Caffè, G-Drink and G-Snack machine model and MMV Brain totem that holds the selection panel and payment systems, the new G-Drink Slave will become your next business ally and boost your existing vending installation.

Purchased products will be delivered swiftly to the ergonomically designed delivery eyelet.

Try pairing a G-Drink Slave with the connectable master vending machine and provide your customers with a wide range of products to choose from.



**G-DRINK 9
SLAVE
DS9 | DS9-B**



**G-DRINK 6
SLAVE
DS6 | DS6-B**

DIMENSIONS H x W x D	1830* x 1215 x 845 mm	1830* x 940 x 845 mm
WEIGHT (NET - Standard machine without options)	345 kg	295 kg
NO. OF SELECTIONS PER SHELF	9	6
NO. OF SHELVES	Standard 5 / Max. 7	Standard 5 / Max. 7
NO. OF SELECTIONS	Standard 45 / Max. 63	Standard 30 / Max. 42
MAX. CAPACITY (0,33 l CANS)	504	336
MAX. CAPACITY (0,50 l PET BOTTLES)	360	240
PROTOCOL	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic
COOLING UNIT		
INTERNAL TEMPERATURE RANGE	+2°C up to +10°C	+2°C up to +10°C
MAX. POWER CONSUMPTION	800 W	800 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz
CLIMATE CLASS	N (+16°C up to +32°C)	N (+16°C up to +32°C)
ENERGY CLASS		
ENERGY CONSUMPTION (kWh/annum)	1562	1330

* With adjustable leveling screw.



Also available in
Design Line version



OPTION LIST

- Special coded lock (Rielda)
- Wall/floor fixing kit
- Various fitting kits
- Customization
- Customized cabinet colour

STANDARD COLOUR

Black ●


**PET BOTTLES, GLASS BOTTLES, CANS
VENDIBLE PRODUCT SIZE**

Diameter	min. 43.5 mm	max. 73 mm
Height	min. 88 mm	max. 285 mm
Weight	min. 185 g	max. 653 g (980 g x6F)



**CARTON PACKS (BRICK)
VENDIBLE PRODUCT SIZE**

Width	min. 52 mm	max. 67 mm
Depth	min. 40 mm	max. 47 mm
Height	min. 85 mm	max. 134 mm
Weight	min. 213 g	max. 400 g



Please note: The above dimensions are for reference only.
Some products, although within the above dimensions, may be difficult to vend due to its shape.
Please vend test products before filling machine.



G-Snack SS6-B

■ G-SNACK SLAVE

Better together

G-Snack Standard Slave is the automatic vending machine that benefits from all the perks of the leading vending machine models on the market, but on a budget. Backed with SandenVendo's expertise in thermo-dynamics and cooling systems, G-Snack Standard Slave will broaden your vending possibilities by simply pairing with any G-Caffè, G-Drink or G-Snack master model available.

Versatile by nature, this automatic slave vending machine can accommodate up to 10, 8 or 6 selections per shelf among snacks, drinks, lunch bites and dairy products thanks to its temperature range that goes from +2°C to +18°C.

Its extreme versatility allows G-Snack Standard Slave to be suitable for installation inside automated shops as an Extra-Vending machine that dispenses merchandising items.



**G-SNACK STANDARD
TEN (X) SLAVE**
SSX | KSX* | SSX-B | KSX-B*

**G-SNACK STANDARD
EIGHT (VIII) SLAVE**
SS8 | KS8* | SS8-B | KS8-B*

**G-SNACK STANDARD
SIX (VI) SLAVE**
SS6 | KS6* | SS6-B | KS6-B*

DIMENSIONS H x W x D	1830 x 980 x 845 mm	1830 x 830 x 845 mm	1830 x 685 x 845 mm
WEIGHT (NET - Standard machine without options)	290 kg	240 kg	220 kg
NO. OF SELECTIONS PER SHELF	10	8	6
NO. OF SHELVES	Standard 6 / Max. 7	Standard 6 / Max. 7	Standard 6 / Max. 7
NO. OF SELECTIONS	Max. 70	Max. 56	Max. 42
PROTOCOL	Executive / MDB	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic	Electronic
COOLING UNIT			
INTERNAL TEMPERATURE RANGE	+2°C up to +18°C	+2°C up to +18°C	+2°C up to +18°C
MAX. POWER CONSUMPTION	600 W	600 W	550 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz	230/240 V - 50 Hz
CLIMATE CLASS	ST (+16°C up to +38°C)	ST (+16°C up to +38°C)	ST (+16°C up to +38°C)
ENERGY CLASS	 Cat. 2	 Cat. 3	 Cat. 4
ENERGY CONSUMPTION (kWh/annum)	1087 Cat. 2	1666 Cat. 3	1607 Cat. 4

*KS (Linux OS) to connect with Touch Panel machines



Also available in
Design Line version



OPTION LIST

- Speedy lift
- E-labeling
- Rotary & Belt System
- Kit sandwich/baguette
- Motorized lock delivery eyelet
- Special coded lock (Rielda)
- Wall/floor fixing kit
- Various fitting kits
- Customization
- Customized cabinet colour

STANDARD COLOUR

Black ●



DUO SYNCHRO SPIRAL
An innovative system with a double motor drive that rotates perfectly synchronized in distance. Ideal for wide and bulky products.



SPEEDY LIFT
Delicate and/or fragile products can be sold at eye-height position!
Speedy delivery of the products is guaranteed!



G-Snack EVS

■ G-SNACK EVOLUTION SLAVE

The ultimate vending right-hand man

Designed to comply with the customers' needs of expanding their vending business by installing multiple vending machines, G-Snack Evolution Slave is SandenVendo's flagship automatic slave vending machine that can work with any G-Caffè, G-Drink or G-Snack master vending machines that hold the selection panel and a single payment system.

Effortlessly modern and hi-tech, G-Snack Evolution Slave presents a spacious motorized central delivery eyelet that provides for an ergonomic, user-friendly and smart purchasing experience.



**G-SNACK
EVOLUTION SLAVE 8
EVS**



**G-SNACK
EVOLUTION SLAVE 10
ESX**

DIMENSIONS H x W x D	1830 x 835 x 890	1830 x 980 x 890	
WEIGHT (NET - Standard machine without options)	235 Kg	260 Kg	
NO. OF SELECTIONS PER SHELF	8	10	
NO. OF SHELVES	Standard 6 / Max. 7	Standard 6 / Max. 7	
NO. OF SELECTIONS	Max. 56	Max. 70	
PROTOCOL	Executive / MDB	Executive / MDB	
COOLING SYSTEM CONTROL	Electronic	Electronic	
COOLING UNIT			
INTERNAL TEMPERATURE RANGE	+2°C up to +10°C	+2°C up to +10°C	
MAX. POWER CONSUMPTION	600 W	600 W	
POWER SUPPLY	220/240 V - 50/60 Hz	220/240 V - 50/60 Hz	
CLIMATE CLASS	ST (+16°C up to +38°C)	ST (+16°C up to +38°C)	
ENERGY CLASS	 Cat. 2	 Cat. 3	 Cat. 4
ENERGY CONSUMPTION (kWh/annum)	975 Cat. 2	1569 Cat. 3	1521 Cat. 4

* KS (Linux OS) to connect with Touch Panel machines




OPTION LIST

- E-labeling
- Rotary & Belt System
- Kit sandwich/baguette
- Special coded lock (Rielda)
- Wall/floor fixing kit
- Various fitting kits
- Customization
- Customized cabinet colour

STANDARD COLOUR

Black ●

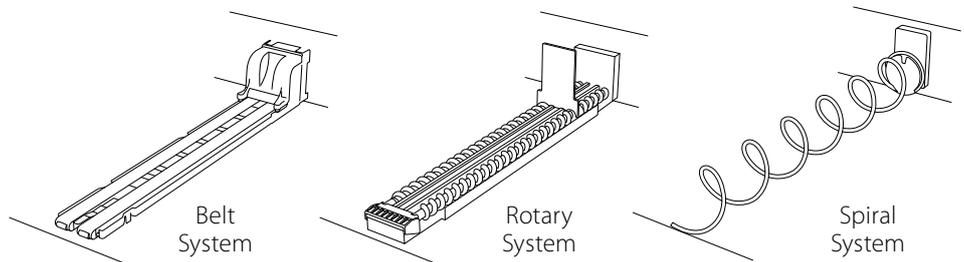

CHOOSE AMONG 3 DIFFERENT VENDING DELIVERY SYSTEMS

Our Belt, Rotary and Spiral modular delivery systems represent the most flexible solution for dispensing a vast array of edible and merchandising items by simply adjusting each module according to each product size.



G-Snack SSX-OD

■ G-SNACK OUTDOOR SLAVE

The ultimate outdoor vending solution

The new G-Snack Outdoor Slave is designed to provide extra flexibility to any outdoor vending business: a smart solution that can be connected to any existing master outdoor model to easily increase sales opportunities. Especially suitable for Extra Vending and merchandising items, G-Snack Outdoor Slave can accommodate a large array of edible products and beyond.

Backed by SandenVendo's expertise in thermo-dynamics and cooling systems, G-Snack Outdoor Slave comes with a thermal-magnetic circuit breaker and a temperature controller specially designed to operate under severe weather conditions. IP34 waterproof certified, this model comes with a heated anti-condensation glass, a new anti-vandal design and a smart LED illumination system.



**G-SNACK OUTDOOR
TEN (X) SLAVE
SSX OD | KSX OD***

**G-SNACK OUTDOOR
EIGHT (VIII) SLAVE
SS8 OD | KS8 OD***

**G-SNACK OUTDOOR
SIX (VI) SLAVE
SS6 OD | KS6 OD***

DIMENSIONS H x W x D	1900 x 1015 x 1010 mm	1900 x 870 x 1010 mm	1900 x 775 x 1010 mm
WEIGHT (NET - Standard machine without options)	340 kg	300 kg	275 kg
NO. OF SELECTIONS PER SHELF	10	8	6
NO. OF SHELVES	Standard 6 / Max. 7	Standard 6 / Max. 7	Standard 6 / Max. 7
NO. OF SELECTIONS	Max. 70	Max. 56	Max. 42
PROTOCOL	Executive / MDB	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic	Electronic
COOLING UNIT			
INTERNAL TEMPERATURE RANGE	+2°C up to +18°C	+2°C up to +18°C	+2°C up to +18°C
AMBIENT TEMPERATURE RANGE	-15°C up to +32°C	-15°C up to +32°C	-15°C up to +32°C
MAX. POWER CONSUMPTION	540 W	540 W	540 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz	230/240 V - 50 Hz
ENERGY CLASS			
ENERGY CONSUMPTION (kWh/annum)	1718 Cat. 2	2479 Cat. 3	2443 Cat. 4
		1492 Cat. 2	2151 Cat. 3
		2122 Cat. 4	1963 Cat. 2
			2200 Cat. 3
			2009 Cat. 4

*KS (Linux OS) to connect with Touch Panel machines



OUTDOOR FEATURES

- Armoured front door
- Roof
- Thermal magnetic circuit breaker
- Temperature controller for outdoor
- Cooling unit with heater anti-freeze function (works also outside temperature below zero)
- Waterproof IP34
- Anti-vandalism (coin insert, key pad and coin-return)
- Lock protection
- Heated glass anti-condensation
- An excellent led illumination also in dark



OPTION LIST

- Speedy lift
- E-labeling
- Rotary & Belt System
- Kit sandwich/baguette
- Motorized lock delivery eyelet
- Special coded lock (Rielda)
- Wall/floor fixing kit
- Various fitting kits
- Customization
- Customized cabinet colour

STANDARD COLOUR

Black ●



SPEEDY LIFT

Delicate and/or fragile products can be sold at eye-height position! Speedy delivery of the products is guaranteed!



SC5 €

Coin changer Sanden 5 tubes

5 DIFFERENT VERSIONS TO MEET ALL YOUR NEEDS.

PROTOCOL	MDB / EXE
ACCEPTANCE	5c, 10c, 20c, 50c, 1€, 2€
TEMPERATURE RANGE	-15 °C up to +60 °C
MAX HUMIDITY	90%
POWER CONSUMPTION	Stand-by 2.7 W / max. 27.9 W
POWER SUPPLY	MDB version: 20,0 VDC up to 42,5 VDC EXE version: 20,4 VAC up to 26,4 VAC
DIMENSIONS H x W x D (mm)	380 x 140 x 84
WEIGHT (NET - Standard machine without options)	1,8 kg

DUAL C

A coin changer with double protocol: Executive Master or MDB slave.

All the AUDIT EVA DTS data are available through Jack connector of coin changer or with a handy terminal (optional).

Change 1 Euro

DUAL D

A coin changer with multiprotocol, giving a possibility to connect with a vending machine in Executive and up to 2 payment system in MDB simultaneously, as well as with protocol MDB slave.

All the AUDIT EVA DTS data are available through Jack connector of coin changer or with a handy terminal (optional).

Change 1 Euro

MDB E

You can obtain as many as 24 different configuration in only one coin cassette, by using only 2 additional spacers (1 Euro and 20 cents).

Ideal for the vending machine to retail expensive products and/or to use along with the bill validator. This model gives also 2€ as a change.

Change 1 Euro / 2 Euro

MDB D

A coin changer with MDB protocol: Coin cassette with an additional feature to give 1€ as a change.

Change 1 Euro

UNI A

A coin changer with MDB protocol designed for the Tobacco sector, parking etc. The system is protected against humidity.

Stand-by function for energy saving. Automatic device to convert from 12V to 24V. A unique cassette with 12 different configurations.

Change 1 Euro / 2 Euro

COIN TUBE CAPACITY

COIN	QUANTITY
5c	86
10c	72
20c	65
50c	58
1€	59
2€ *	59

* Only for MDB E and UNI A

NB The above quantities are indicative and it varies according to the coin-changer types.

- ▶ Easy and user-friendly programming and handling
- ▶ Transparent cover for immediate diagnostics
- ▶ DIL-switch board for fast and easy configuration
- ▶ Individual tube level programming
- ▶ Programming mode for 2 free vend tokens
- ▶ Data retrieval and prophetic interfaces
- ▶ Programming mode to reject false coins
- ▶ Modular components
- ▶ 5 tubes for high capacity
- ▶ Anti-manipulation devices



OPTION LIST

- Conversion kit / spacer kit 10c for tube e & others
- Palm top and accessories
- Thermo-printer (dex) for dual c and d
- Handy terminal for dual c and d

© 2023 SandenVendo GmbH
All rights reserved.

Technical data, images and information provided on this document is intended for informational purposes only; All specifications are subject to change without notice.

Rev. 02 - 2023

Germany

SandenVendo GmbH

PH +49 (0) 211 74039 0
info@sandenvendo.de

Representative office UK

PH +44 7515 812516
info@sandenvendo.co.uk

Benelux

**SandenVendo Belgium Branch
of SandenVendo GmbH**

PH +32 2 268 2595
info@sandenvendo.be

Italy

**SandenVendo GmbH
Italian Branch**

PH +39 0142 234 220
marketing@sandenvendo.it

Spain

**SandenVendo Spain
Sucursal en España**

PH +34 93 474 1555
info@sandenvendo.es

France

**SandenVendo France Branch
of SandenVendo GmbH**

PH +33 1 70 38 24 88
info@sandenvendo.fr

www.sandenvendo.com

